


CH 450

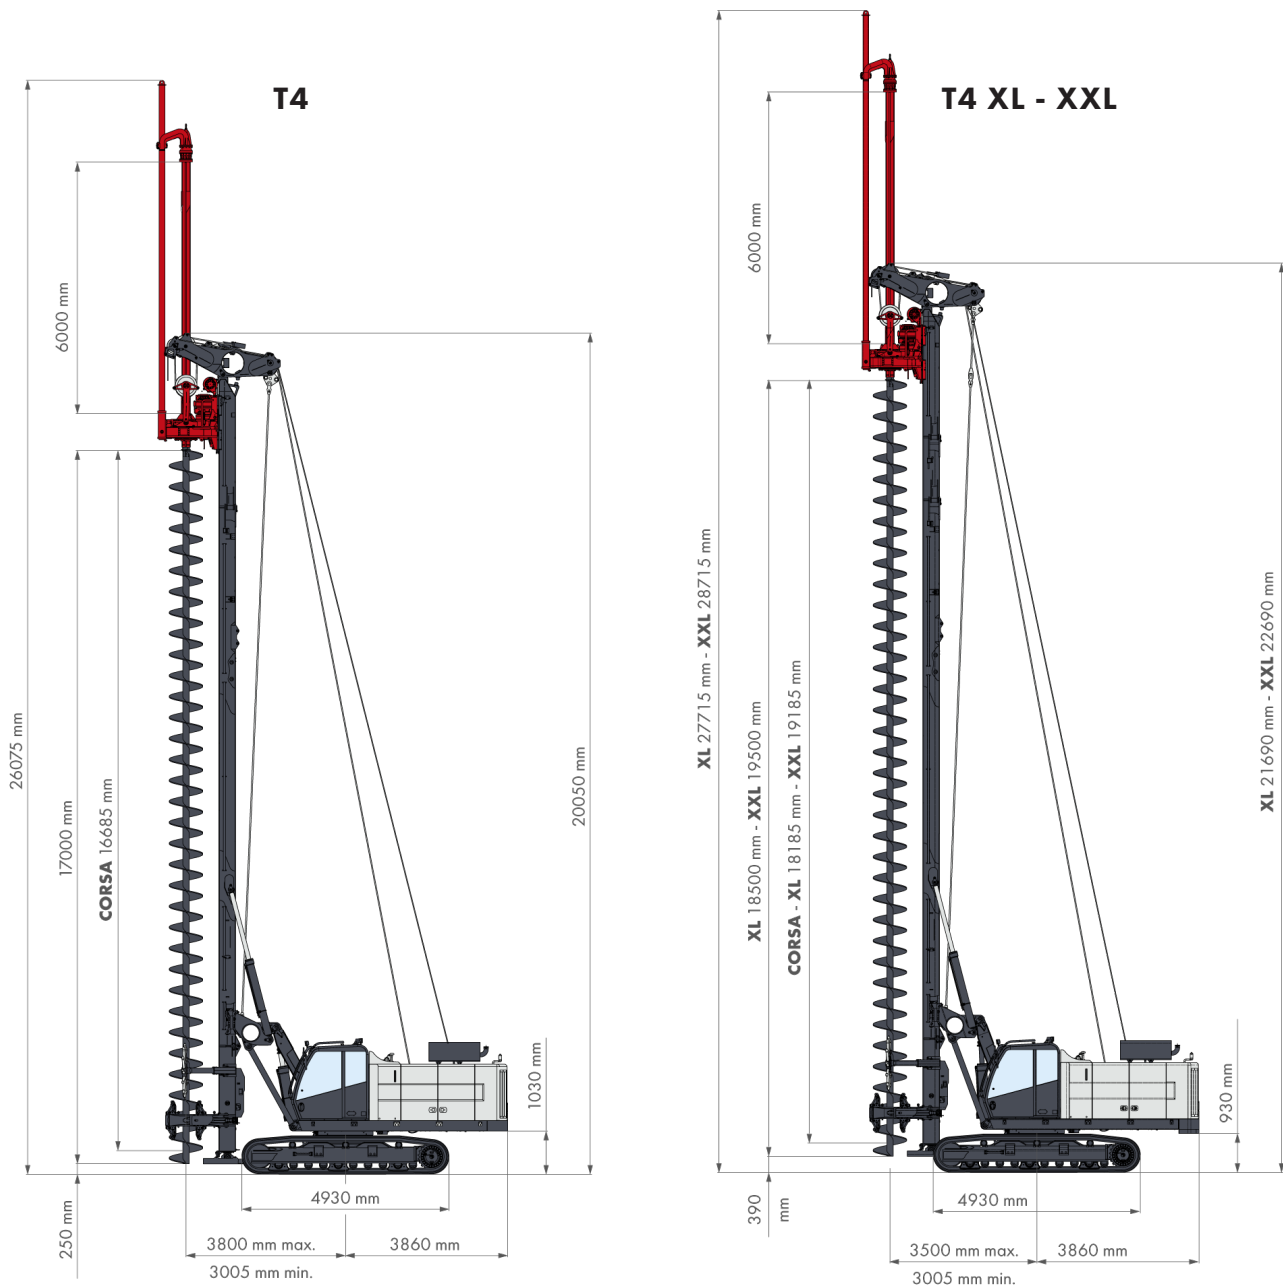

CFA (Pali ad Elica Continua)		s.m.	s.i.		T4		T4 XL		T4 XXL	
Coppia max. nominale		kNm	lbf-ft		190 at 33 MPa		140,000 at 4,800 psi			
Coppia max.		kNm	lbf-ft		165 at 28,5 MPa		121,700 at 4,130 psi			
Potenza nominale del motore		kW	hp		201 - 209 at 2000 rpm		274 - 284 at 2000 rpm			
Diametro max. palo		mm	ft-in	1.000	3' 3"	1.000	3' 3"	1.000	3' 3"	
Lunghezza max. eliche		mm	ft-in	17.000	55' 9"	18.500	60' 8"	19.500	63' 11"	
Profondità max. palo		mm	ft-in	16.500 + 6.000 = 22.500	54' 2" + 19' 8" = 73' 10"	18.000 + 6.000 = 24.000	59' 1" + 19' 8" = 78' 9"	19.000 + 6.000 = 25.000	62' 4" + 19' 8" = 81' 12"	
Forza di estrazione		kN	lbs	480	107,900	480	107,900	480	107,900	
Spinta su eliche		kN	lbs	45 ¹	10,200 ¹	45 ¹	10,200 ¹	45 ¹	10,200 ¹	
Peso operativo senza utensile		ton		42,5 ²		42,5 ²		43,7 ²		
NOTE	1 - Opzionale 100 kN				2 - Incluso prolunga elica, pulitore, girevole e curva cemento					