


CX-T 20



	m.s.	i.s.		
Truck (axles) Camion (châssis)	-	-	6x4 - 6x6 - 8x4 - 8x6 - 8x8 (3/4)	
Engine Power Puissance Moteur	kW	HP	205 - 245	278 - 333
Emission Level Norme d'Émissions	-	-	Stage 3A / Tier 3 - Stage 5 / Tier 4f (HT Line)	
Feed Stroke Course Utile	mm	ft-in	4.500 - 7.000	14' 9" - 22' 12"
Feed Force Force de Poussée	daN	lbs	12.000	26,977
Retract Force Force de Traction	daN	lbs	20.000	44,961
Weight Poids	ton		12 - 18	

	m.s.	i.s.	DD	RC
Rotary Torque Range Couple Rotative	Nm lb * ft		5.365 - 15.200 3,957 - 11,211	7.150 - 37.500 5,274 - 27,659
Rotary Speed Range Vitesse Rotative	rpm		900 - 1.250	110 - 915
Clamp Range Diam. Tige min/max	mm in		45 - 365 1" 3/4 - 14" 3/8	45 - 365 1" 3/4 - 14" 3/8
Fluid Circulation Pump Pompe de Circulation de Fluide	l/min. gal/min.		300 79.2	-
Wire-line winch Treuil Wire-line	m ft		1.800 5,905	-
On Board Compressor Compresseur à bord	Max. Flow	l/sec. cfm	-	672 1424
	Max. Pressure	bar psi		35 507

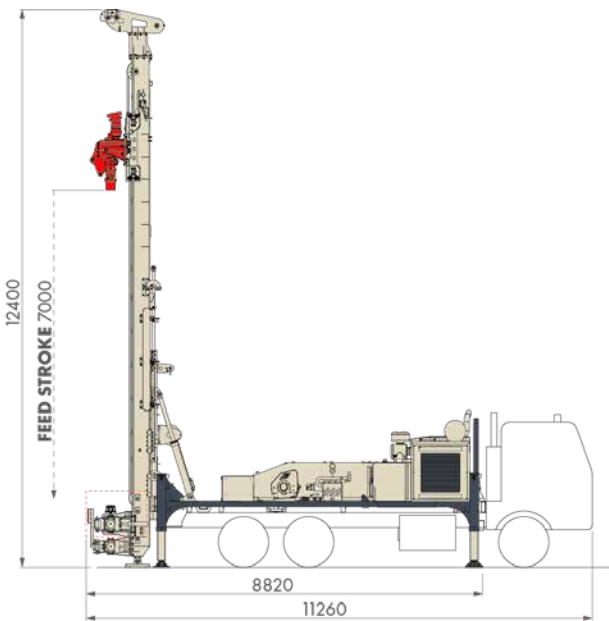